


法兰接头

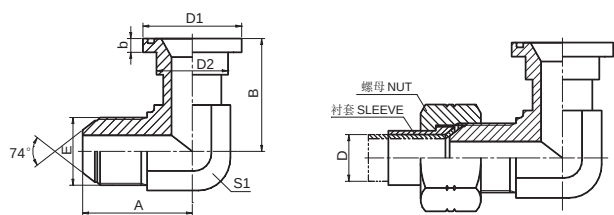

90° 弯美制 JIC 外螺纹 74° 外锥 / 重系列法兰 ISO 6162-2
KF1JFS9 90° ELBOW JIC MALE 74° CONE / S-SERIES FLANGE ISO 6162-2

代 号 PART NO.	螺 纹 THREAD		法 兰 型 号	O 形 圈	尺 寸 DIMENSIONS					
	E		FLANGE SIZE	O RING	A	B	b	D1	D2	S1
KF1JFS9-08	3/4"X16		1/2"	O210	32.5	44	7.75	31.7	24	19
KF1JFS9-10-08	7/8"X14		1/2"	O210	37.5	46	7.75	31.7	24	22
KF1JFS9-10-12	7/8"X14		3/4"	O214	41	54.1	8.76	41.3	32	27
KF1JFS9-12	1.1/16"X12		3/4"	O214	44.2	54.1	8.76	41.3	32	27
KF1JFS9-12-16	1.1/16"X12		1"	O219	48	60.2	9.6	47.6	38	33
KF1JFS9-16	1.5/16"X12		1"	O219	49	60.2	9.53	47.6	38	33
KF1JFS9-16-12	1.5/16"X12		3/4"	O214	49	57	8.76	41.3	32	33
KF1JFS9-16-20	1.5/16"X12		1.1/4"	O222	54	66.5	10.29	54	44	41
KF1JFS9-20	1.5/8"X12		1.1/4"	O222	55.5	66.5	10.29	54	44	41
KF1JFS9-20-16	1.5/8"X12		1"	O219	55.5	65	9.53	47.6	38	41
KF1JFS9-20-24	1.5/8"X12		1.1/2"	O225	59.5	79.3	12.57	63.5	51	48
KF1JFS9-24	1.7/8"X12		1.1/2"	O225	62.5	79.3	12.57	63.5	51	48
KF1JFS9-24-20	1.7/8"X12		1.1/4"	O222	62.5	70	10.29	54	44	48

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。
管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。

Note: Nut and sleeve should be ordered separately.The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.